


Disc brake mount adapter application

How to read Model No.

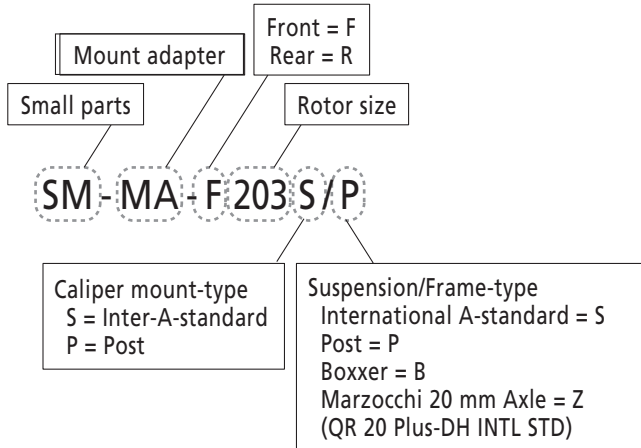

Mount adapter / Model No.	
SM-MA-F203S/S	SM-MA-F180P/S
SM-MA-F203S/P	SM-MA-F180P/P
SM-MA-F203S/B	SM-MA-F170S/P
SM-MA-F203S/Z	SM-MA-F160P/S
SM-MA-F203P/S	SM-MA-F160P/Z
SM-MA-F203P/P	SM-MA-R203S/S
SM-MA-F203P/B	SM-MA-R203P/S
SM-MA-F203P/Z	SM-MA-R180S/S
SM-MA-F180S/S	SM-MA-R180P/S
SM-MA-F180S/P	SM-MA-R160P/S

BR-M975/M975P Disc brake mount adapter application table

Please note we have 4 kinds of Calipers and refer following chart for adapter combination.

	Mount type	Original specification without mount adapter
Caliper A	A-Standard	For Front 160 mm and for rear 140 mm Rotor use
Caliper B	A-Standard	For Rear 160 mm Rotor use
Caliper C	A-Standard	For Front 180 mm Rotor use

BR-M975P for Post mount use, We have only one kind.

< For front >

	Mount type	Model	Mount way	ROTOR		
				SM-RT97 ∅160 mm	SM-RT97M ∅180 mm	SM-RT97L ∅203 mm
CALIPER	A-Standard	BR-M975 Caliper A	for A-standard mount	Direct attachment	SM-MA-F180S/S	SM-MA-F203S/S
			for POST mount	————	SM-MA-F180S/P	SM-MA-F203S/P
	A-Standard	BR-M975 Caliper C	for A-standard mount	————	Direct attachment	————
	Post-Mount	BR-M975P	for A-standard mount	————	SM-MA-F180P/S	SM-MA-F203P/S
for POST mount			Direct attachment	SM-MA-F180P/P	SM-MA-F203P/P	

	Mount type	Caliper Model	Fork model	ROTOR		
				SM-RT97 ∅160 mm	SM-RT97M ∅180 mm	SM-RT97L ∅203 mm
CALIPER	A-Standard	BR-M975 Caliper A	Marzocchi 20 mm axle	————	————	SM-MA-F203S/Z
			Boxxer-type	————	————	SM-MA-F203S/B
	Post-Mount	BR-M975P	Marzocchi 20 mm axle	SM-MA-F160P/Z	————	SM-MA-F203P/Z
			Boxxer-type	————	————	SM-MA-F203P/B

< For rear >

	Mount type	Model	ROTOR			
			SM-RT97SS ∅140 mm	SM-RT97 ∅160 mm	SM-RT97M ∅180 mm	SM-RT97L ∅203 mm
CALIPER	A-Standard	BR-M975 Caliper B	————	Direct attachment	SM-MA-R180S/S	SM-MA-R203S/S
	A-Standard	BR-M975 Caliper A	Direct attachment	————	————	————
	Post-Mount	BR-M975P	SM-MA-F160P/S	SM-MA-R160P/S	SM-MA-R180P/S	SM-MA-R203P/S

■ Shimano hydraulic disc brake mount adapter application table

< For front >

Model	Rotor diameter	Mount-type			
		A-standard	MARZOCCHI 20 mm Axle (QR 20 Plus-DH INTL STD)	BOXXER-type	POST-type
BR-M800	∅ 203	SM-MA-F203P/S	SM-MA-F203P/Z	SM-MA-F203P/B	SM-MA-F203P/P
	∅ 180	SM-MA-F180P/S	————	————	SM-MA-F180P/P
	∅ 160	SM-MA-F160P/S	SM-MA-F160P/Z	————	Direct attach
NEW BR-M775 BR-M601 BR-M585 BR-M535	∅ 203	SM-MA-F203P/S	SM-MA-F203P/Z	SM-MA-F203P/B	SM-MA-F203P/P
	∅ 180	SM-MA-F180P/S	————	————	SM-MA-F180P/P
	∅ 160	SM-MA-F160P/S	SM-MA-F160P/Z	————	Direct attach
NEW BR-M485	∅ 203	SM-MA-F203P/S	SM-MA-F203P/Z	SM-MA-F203P/B	SM-MA-F203P/P
	∅ 180	SM-MA-F180P/S	————	————	SM-MA-F180P/P
	∅ 160	SM-MA-F160P/S	SM-MA-F160P/Z	————	Direct attach

< For rear >

Model	Rotor diameter	A-standard
BR-M800	∅ 203	SM-MA-R203P/S
	∅ 180	SM-MA-R180P/S
	∅ 160	SM-MA-R160P/S
NEW BR-M775 BR-M601 BR-M585 BR-M535	∅ 203	SM-MA-R203P/S
	∅ 180	SM-MA-R180P/S
	∅ 160	SM-MA-R160P/S
NEW BR-M485	∅ 203	SM-MA-R203P/S
	∅ 180	SM-MA-R180P/S
	∅ 160	SM-MA-R160P/S

■ Shimano hydraulic disc brake mount adapter application table

< For front >

Model	Rotor diameter	Mount-type			
		A-standard	MARZOCCHI 20 mm Axle (QR 20 Plus-DH INTL STD)	BOXXER-type	POST-type
BR-M545 BR-M465	∅ 203	SM-MA-F203P/S	SM-MA-F203P/Z	SM-MA-F203P/B	SM-MA-F203P/P
	∅ 180	SM-MA-F180P/S	————	————	SM-MA-F180P/P
BR-M415	∅ 160	SM-MA-F160P/S	SM-MA-F160P/Z	————	Direct attach
BR-R505	∅ 160	SM-MA-F160P/S	————	————	————

< For rear >

Model	Rotor diameter	A-standard
BR-M545 BR-M465	∅ 203	SM-MA-R203P/S
	∅ 180	SM-MA-R180P/S
BR-M415	∅ 160	M475 Adapter (R)
BR-R505	∅ 160	M475 Adapter (R)